



Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing intervals [mm]	Connections distance from the wall [mm]	Brackets spacing intervals [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power (75/65/20 °C) [W]	Power (75/65/24 °C) [W]	Power (55/45/24 °C) [W]	Electric heater maximal power [W]
W	H	D	C	B	A							
600	615	90	50	55	400	0,98	14,1	6,5	379	341	167	-
600	471	90	50	55	400	0,77	11,7	5,4	297	268	132	-
1000	615	90	50	55	800	1,58	21,5	10,2	631	569	279	-
1000	471	90	50	55	800	1,24	17,5	8,3	496	447	219	-
1400	615	90	50	55	1200	2,18	28,8	13,8	883	796	391	-
1400	471	90	50	55	1200	1,70	23,3	11,2	694	625	307	-
1800	615	90	50	55	1600	2,77	36,2	17,4	1136	1024	502	-
1800	471	90	50	55	1600	2,16	29,1	14,1	892	804	394	-
2200	615	90	50	55	2000	3,37	43,5	21,1	1388	1251	614	-
2200	471	90	50	55	2000	2,62	35,0	17,0	1091	983	482	-

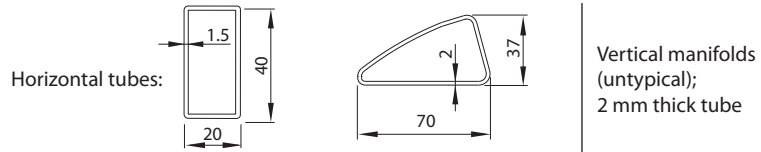

Finishing and warranty:	- phosphatizing + electrophoresis + polyester-epoxy lacquer; 10 year warranty;
Mounting brackets:	Galvanized snop fastener mounting brackets are included
Heater:	-
Working pressure:	4 bars
Maximal temperature:	95 °C
Connections:	 inner threads G 1/2 air-vent plug G1/8 hidden behind
Remarks:	<ul style="list-style-type: none"> - Location of connections and the feed pipe: on the left side of the radiator - Connections to the right side available upon request (in this case the feed pipe is on the right side, whereas the return pipe is on the left)

