



Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing intervals [mm]	Connections distance from the wall [mm]	Brackets spacing intervals [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power (75/65/20 °C) [W]	Power (75/65/24 °C) [W]	Power (55/45/24 °C) [W]	Electric heater maximal power [W]
W	H	D	C	B	A							
595	812	101-106	50	78-83	525	0,75	10,3	3,5	392	354	176	300
595	1097	101-106	50	78-83	525	1,08	14,5	4,9	553	498	245	300
595	1667	101-106	50	78-83	525	1,70	22,3	7,7	849	765	375	600



Vertical manifolds:




Finishing and warranty:

- standard: phosphatizing + polyester-epoxy lacquer; 5 year warranty;
- on request: electrophoresis + polyester-epoxy lacquer; 10 year warranty;

Mounting brackets:

brackets in the same colour as the radiator are included

QX

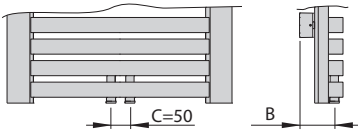

Working pressure:

4 bars

Maximal temperature:

95 °C

Connections:



- inner threads G 1/2
- air-vent plug G1/8 hidden behind

Accessories:

to place a separate order – page 33

Q

