


Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing intervals [mm]	Connections distance from the wall [mm]	Brackets spacing intervals [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power (75/65/20 °C) [W]	Power (75/65/24 °C) [W]	Power (55/45/24 °C) [W]	Electric heater maximal power [W]
W	H	D	C	B	A							
595	818	106-111	50	95-100	525	0,79	9,4	4,5	470	423	207	300
595	1238	106-111	50	95-100	525	1,23	14,4	6,9	726	654	320	600
595	1742	106-111	50	95-100	525	1,77	20,4	10,0	1032	928	450	900
746	818	120-125	50	109-114	676	0,94	10,8	5,1	561	505	245	300
746	1238	120-125	50	109-114	676	1,48	16,6	8,0	866	778	375	600
746	1742	120-125	50	109-114	676	2,13	23,6	11,5	1250	1123	538	900




Finishing and warranty:

- standard: phosphatizing + polyester-epoxy lacquer; 5 year warranty;
- on request: electrophoresis + polyester-epoxy lacquer; 10 year warranty;

Mounting brackets:

brackets in the same colour as the radiator are included

FX

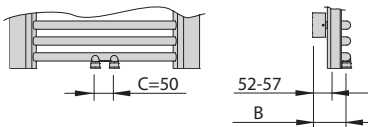

Working pressure:

4 bars

Maximal temperature:

95 °C

F

Connections:



- inner threads G 1/2
- air-vent plug G1/8 positioned behind the radiator

